

Part Number	ADP220M306J		Revision
Customer P/N	0C4030CA01		Revision
Capacitance	30	uF.	Tolerance 5%
Voltage	220	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	2.28	0.03
Thickness (T)	1.18	0.03
Height (H)	1.73	0.03
Total Thickness (Tt)	1.58	0.06
Wire Length (G)	4.00	min
Wire Gauge (Gw)	20	AWG
Wire Color (Cw)	Black	
Mountng Tab Thickness (Mt)	0.20	0.04

Dimensions in inches

Stamping	ADP
	30 uF 5% 220 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	0C4030CA01
	RU, cRU, RoHS

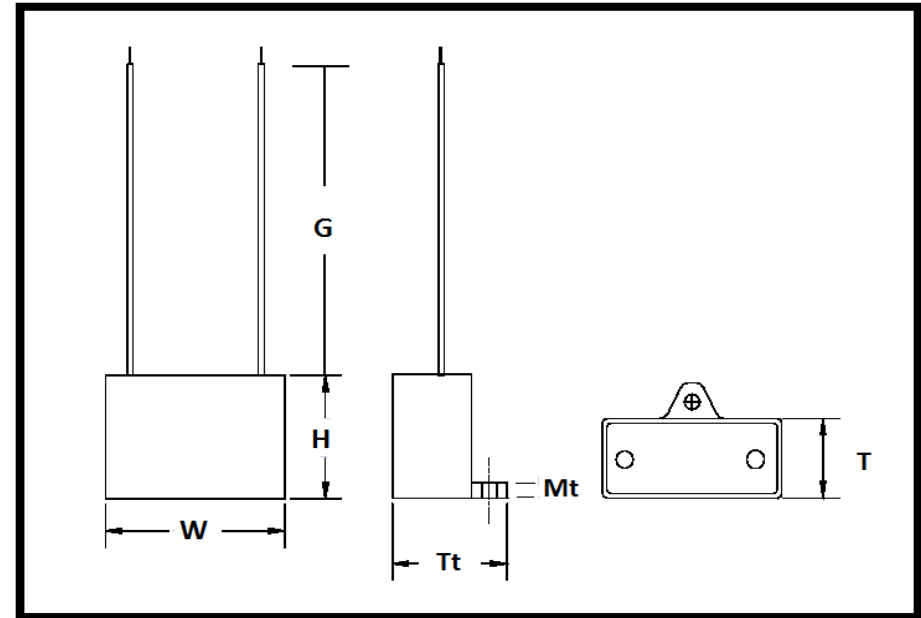

UL Recognized Component

Approval: J.D. Aldana
 Date: March 29, 2001

