


Part Number	ADP250A755JL-M1		Revision
Customer P/N			Revision
Capacitance	7.5	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.	
Insulation Resistance	133	MegOhms minimum	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Width (W)	1.50	0.03
Thickness (T)	0.71	0.03
Height (H)	1.19	max.
Bracket Height (Hb)	0.62	max.
Total Thickness (Tt)	0.81	0.03
Bracket Width (Wb)	0.47

Dimensions in inches

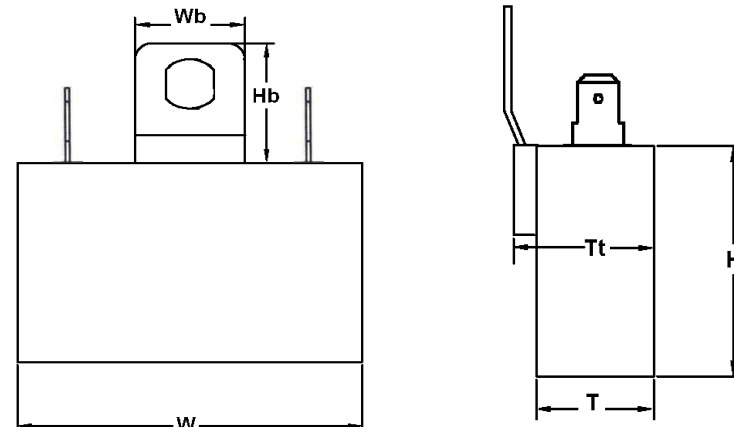

Stamping

(Logo) ADP
 7.5 uF 5% 250 VAC
 -25 - +85 C.
 50 - 60 Hz.
 Motor Cap CBB6-1
 Date Code
 ЯU, сЯU, RoHS




Engineer J.D. Aldana
 Date 12/12/2012