


Part Number	ADP250A755JL		Revision
Customer P/N	10011088		Revision
Capacitance	7.5	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.	
Insulation Resistance	133	MegOhms minimum	


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.50	0.03
Thickness (T)	0.74	0.03
Height (H)	1.19	max.
Bracket Height (Hb)	0.62	max.
Bracket Spacing (Z)	0.51	0.03
Bracket Width (Wb)	0.47

Dimensions in inches

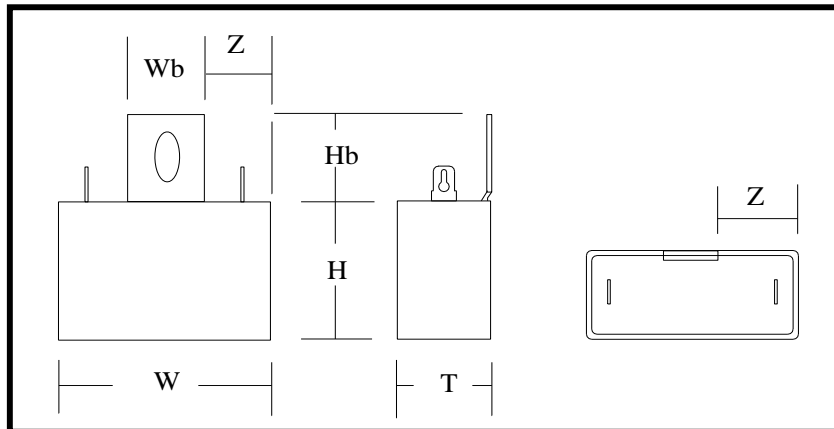

	Stamping
	(Logo) ADP
	7.5 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap CBB6-1
	Date Code
	RU, cRU, RoHS

Approval: J. D. Aldana
 Date December 12, 2012