

Part Number	ADP250M156J-M1		Revision
Customer P/N	195-562-0402		Revision
Capacitance	15	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-40	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.85	0.03
Thickness (T)	0.79	0.03
Height (H)	1.30	0.03
Total Thickness (Tt)	1.22	0.06
Wire Length (G)	3.75	0.50
Wire Gauge (Gw)	20	AWG
Wire Color (Cw)	Black	
Mountng Tab Thickness (Mt)	0.20	0.04

Dimensions in inches

Stamping	Logo/ADP
	15 uF 5% 250 VAC
	-40 - +85 C.
	50 - 60 Hz.
	Motor Cap - CBB61
	195-562-0402
	RU cRU RoHs Date Code

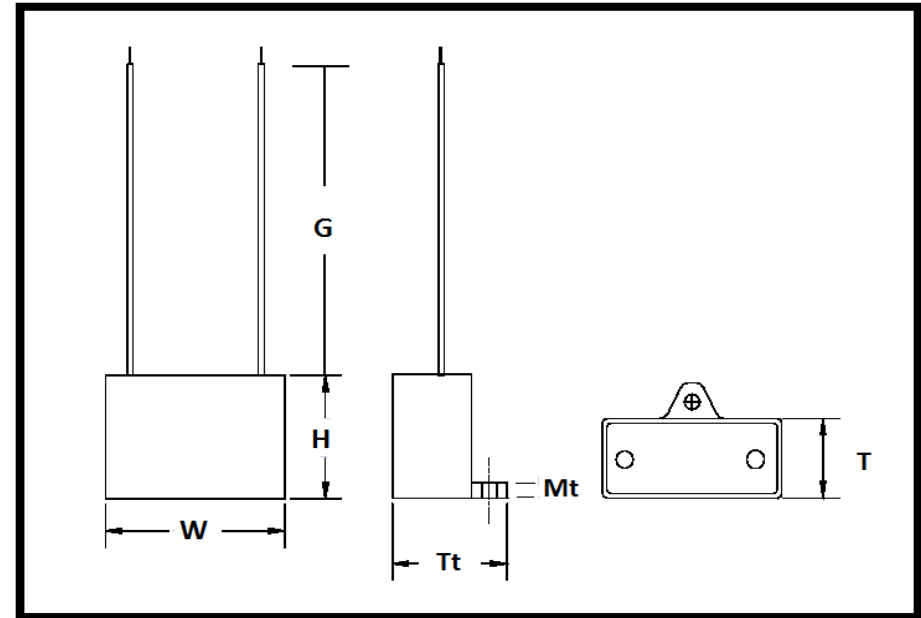

UL Recognized Component

Approval: J.D. Aldana
 Date: July 26, 2013

