

| | | | |
|-----------------------|---------------------------------|---------------|---------------------|
| Part Number | ADP250M205J-M1 | | Revision |
| Customer P/N | | | Revision |
| Capacitance | 2 | uF. | Tolerance 5% |
| Voltage | 250 | VAC | |
| Dielectric | Metallized Polypropylene | | |
| Terminal Type | Insulated Wire Leads | | |
| Operating Temperature | -25 | 85 °C. | |
| Dissipation Factor | 0.001 | maximum | @ 60 Hz. |

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

| | Dimension | Tolerance |
|----------------------------|--------------|-------------|
| Width (W) | 1.26 | 0.03 |
| Thickness (T) | 0.43 | 0.03 |
| Height (H) | 0.86 | 0.03 |
| Total Thickness (Tt) | 0.86 | 0.06 |
| Wire Length (G) | 3.50 | 0.50 |
| Wire Gauge (Gw) | 20 | AWG |
| Wire Color (Cw) | Black | |
| Mountng Tab Thickness (Mt) | 0.20 | 0.04 |

Dimensions in inches

Stamping

Logo/ADP
2 uF 5% 250 VAC
-25 - +85 C.
50 - 60 Hz.
Motor Cap
CBB61
RU, cRU RoHs

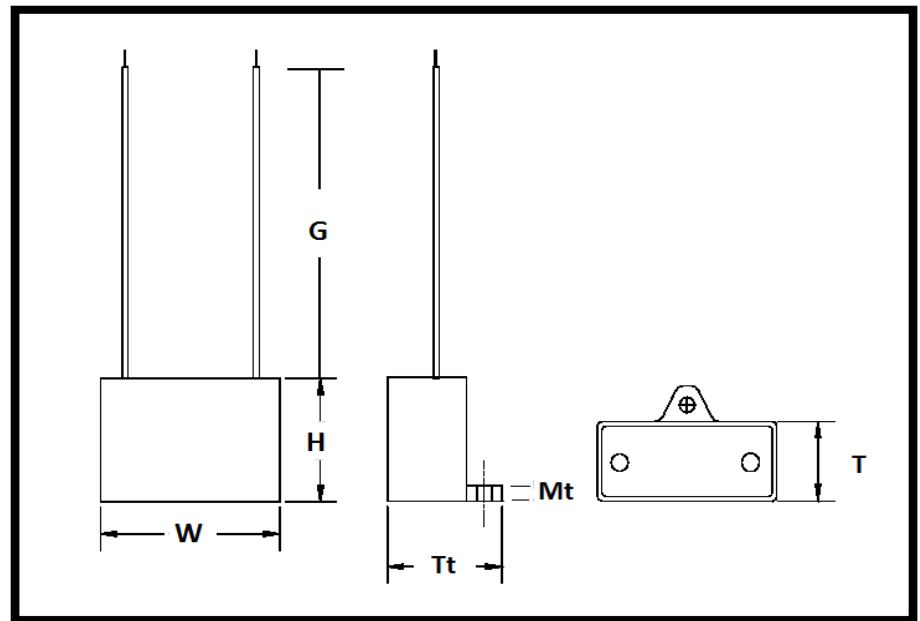

UL Recognized Component

Approval: J.D. Aldana
 Date: July 21, 2011

