

Part Number	ADP250M206J		Revision	A
Customer P/N	195-102-0250		Revision	A
Capacitance	20	uF.	Tolerance	5%
Voltage	250	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-40	85 °C.		
Dissipation Factor	0.001	maximum	@ 60 Hz.	


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.85	0.03
Thickness (T)	0.98	0.03
Height (H)	1.41	0.03
Total Thickness (Tt)	1.43	0.06
Wire Length (G)	4.50	0.50
Wire Gauge (Gw)	20	AWG
Wire Color (Cw)	Black	
Mountng Tab Thickness (Mt)	0.20	0.04

Dimensions in inches

Stamping	<p>Logo/ADP 20 uF 5% 250 VAC -40 - +85 C. 50 - 60 Hz. Motor Cap - CBB61 195-102-0250 RU cRU RoHs Date Code</p>
----------	---

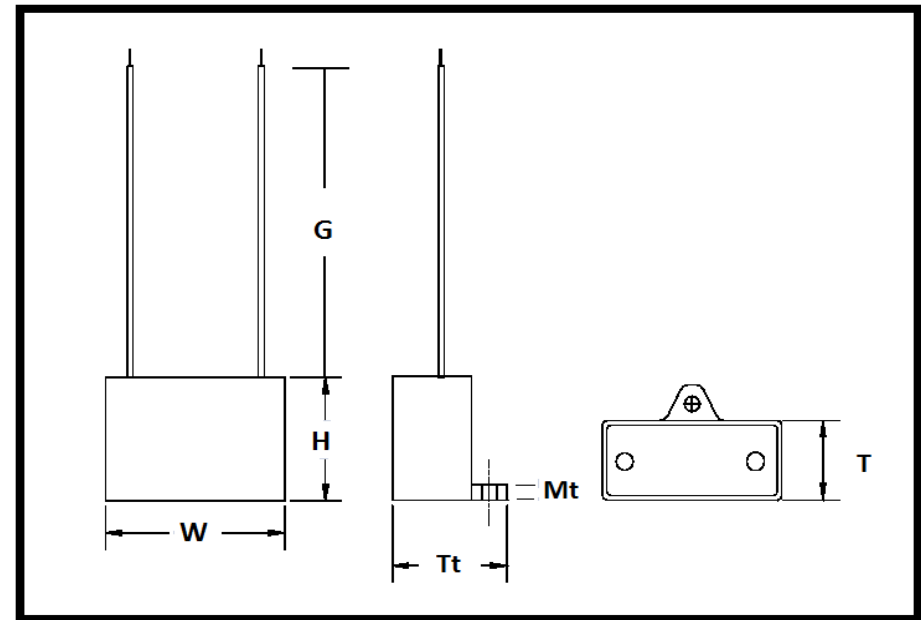

UL Recognized Component

Approval: J.D. Aldana
 Date: March 7, 2012

