

Part Number	ADP370M755J-M2		Revision
Customer P/N	TBD		Revision
Capacitance	7.5	uF.	Tolerance 5%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-40	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Width (W)	1.85	0.03
Thickness (T)	0.87	0.03
Height (H)	1.38	0.03
Total Thickness (Tt)	0.94	0.06
Wire Length (G)	4.50	0.50
Wire Gauge (Gw)	20	AWG
Wire Color (Cw)	Black	
Mountng Tab Thickness (Mt)	0.20	0.04

Dimensions in inches

Stamping

Logo/ADP
7.5 uF 5% 370 VAC
-40 - +85 C.
50 - 60 Hz.
Motor Cap CBB6-1

RU cRU RoHs Date Code

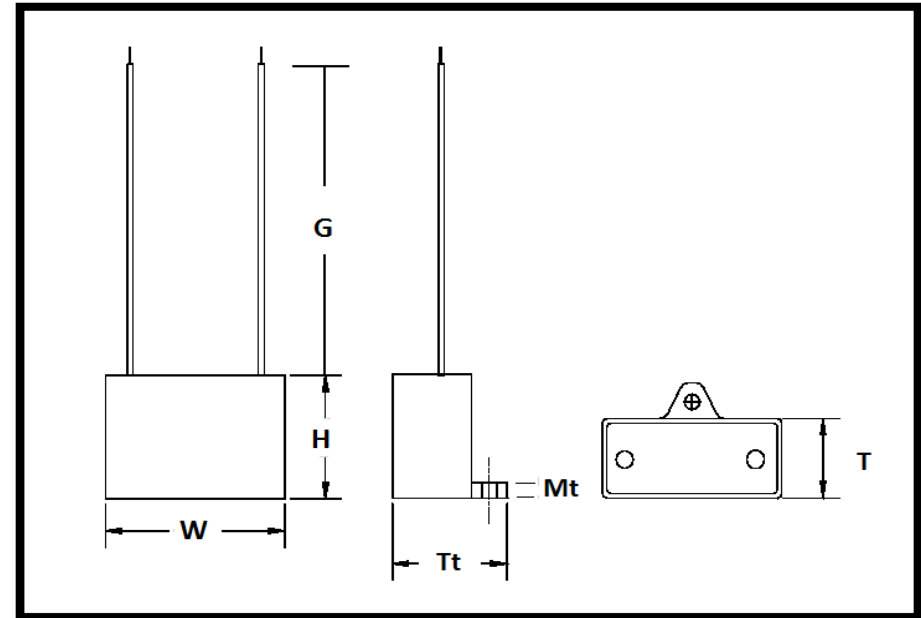

UL Recognized Component

Approval:

J.D. Aldana

Date

June 10, 2011

