

Part Number	ADPS180M106J		Revision
Customer P/N			Revision
Capacitance	10	uF.	Tolerance 5%
Voltage	180	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	70 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


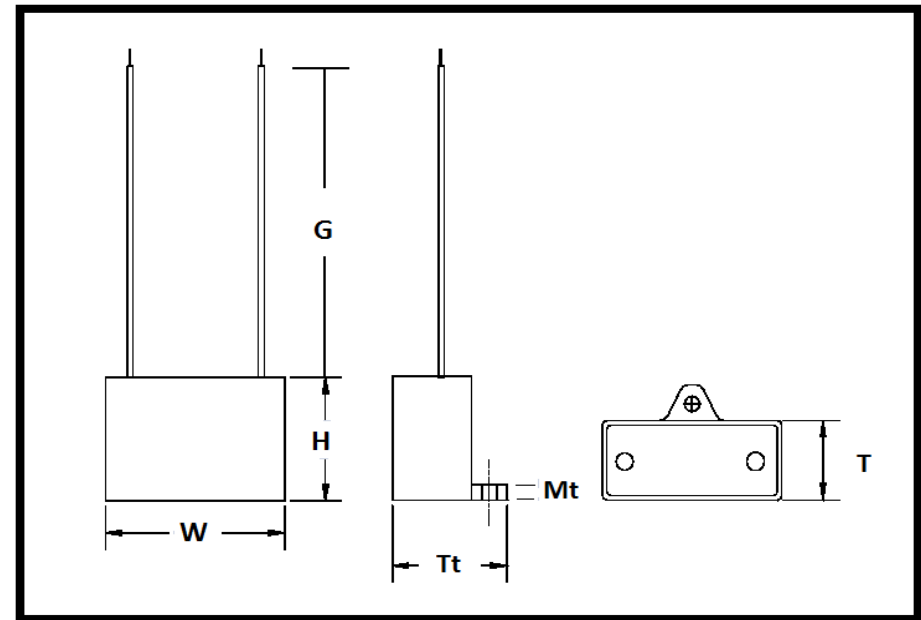
Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.48	0.04
Thickness (T)	0.80	0.04
Height (H)	1.27	0.04
Total Thickness (Tt)	1.21	0.06
Wire Length (G)	8.50	0.50
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	White	
Mountng Tab Thickness (Mt)	0.19	0.02

Dimensions in inches

Stamping

Motor Capacitors
ADPS
10 uF 5% 180 VAC
50/60 Hz +70 C
Protected 10000 AFC
 Date Code
 RU, cRU, RoHS

UL Recognized Component

Approval: J.D. Aldana
 Date October 18, 2016

