


Part Number	ADPS250A305J	Revision
Customer P/N	6100-4148	Revision
Capacitance	3 uF.	Tolerance 5%
Voltage	250 VAC	
Dielectric	Metallized Polypropylene	
Terminal Type	Single .187" X .02" Quick Connect Terminals	
Operating Temperature	-25	85 °C.
Dissipation Factor	0.001	maximum @ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.45	0.03
Thickness (T)	0.47	0.03
Height (H)	0.89	0.03
Total Thickness (Tt)	0.93	0.05
Mounting Hole	0.17	0.01

Dimensions in inches

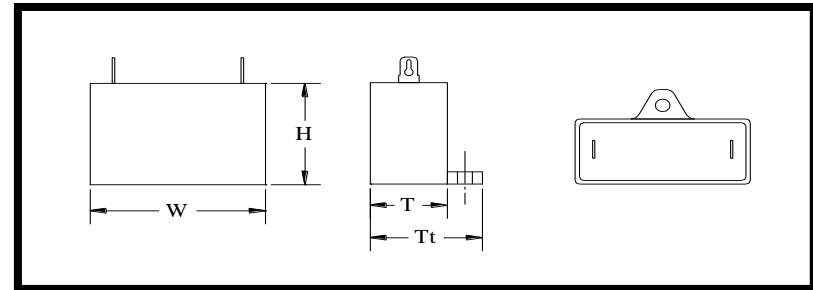

Stamping

ADPS
3 uF 5% 250 VAC
50/60 Hz -25 - +85 C
P2 - Protected 10,000 AFC
Motor Cap - CBB6-1
61004148
RU, cRU, RoHS Date Code

UL Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film

Approval: J.D. Aldana
Date: March 20, 2013