


Part Number	ADPS250A405J-M2	Revision	A
Customer P/N	39018-3	Revision	A
Capacitance	4	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.
Insulation Resistance	250	MegOhms	minimum

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.45	0.06
Thickness (T)	0.51	0.06
Height (H)	0.95	0.06
Total Thickness (Tt)	0.96	0.06
Mounting Hole	0.19	0.02

Dimensions in inches

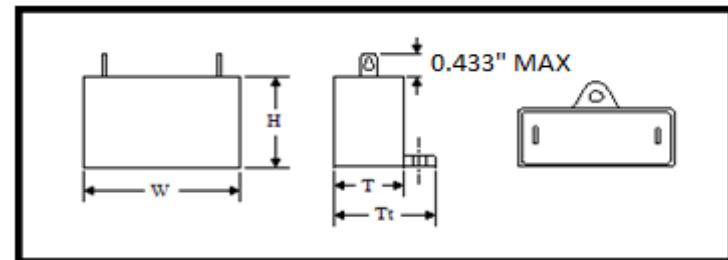

Stamping:	
Logo	ADPS / CBB6-1
	4 uF 5% 250 VAC
	50/60 Hz -25 +85 C
	P2 - Protected
	10,000 AFC Date Code
	RU, cRU, RoHS
	Made in China



RoHS mark on bottom of case:



UL-810 Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film

Engineer *J.D. Aldana*
 Date 1/26/2010