


Part Number	ADPS250A405J		Revision
Customer P/N	39018-3		Revision
Capacitance	4	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.
Insulation Resistance	250	MegOhms	minimum

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.54	0.03
Thickness (T)	0.67	0.03
Height (H)	1.02	0.03
Total Thickness (Tt)	1.06	0.03
Mounting Hole	0.18	0.02

Dimensions in inches

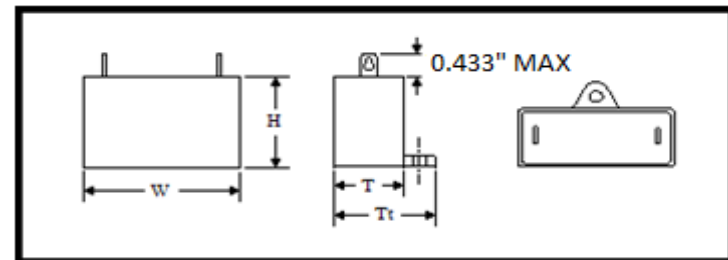

Stamping:	
Logo	ADPS
	4 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	Protected
	RU



ADPS
 4 uF 5% 250 VAC
 -25 - +85 C.
 50 - 60 Hz.
 Motor Cap
 Protected
 RU

UL-810 Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film

Engineer J.D. Aldana
 Date 11/3/2005

RoHS mark on bottom of case:

