


Part Number	ADPS250A505J-M1		Revision
Customer P/N			Revision
Capacitance	5	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Safety Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.49	MIN.
Thickness (T)	0.73	MIN.
Height (H)	1.14	MIN.
Total Thickness (Tt)	1.02	0.03
Mounting Hole	0.18	0.02

*Dimensions in inches*

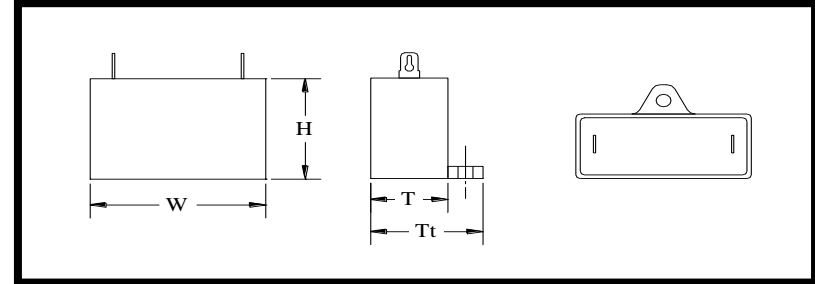

	Stamping
	ADPS / CBB6-1
	5 uF 5% 250 VAC
	50/60 Hz -25 +85 C
	P2 - Protected
	10,000 AFC Date Code
	RU, cRU, RoHS
	Made in China

UL Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film

Approval: J.D. Aldana  
 Date: June 25, 2020