

Part Number	ADPS250A505JL-M2		Revision
Customer P/N	39018-4		Revision
Capacitance	5	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.
Insulation Resistance	200	MegOhms	minimum

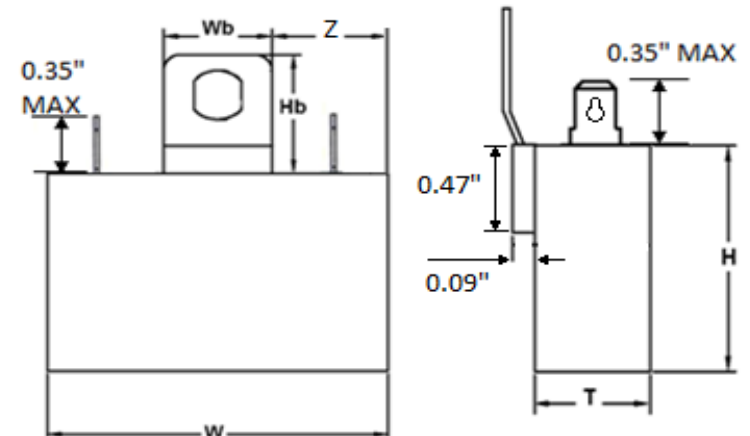
MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.47	0.03
Thickness (T)	0.58	0.03
Height (H)	0.98	0.03
Bracket Height (Hb)	0.62	max
Bracket Spacing (Z)	0.50	0.03
Bracket Width (Wb)	0.47



Dimensions in inches

UL-810 Approved Capacitor



Protected Capacitor: Segmented Metallized Polypropylene Film

Stamping:

ADPS / CBB6-1
 5 uF 5% 250 VAC
 50/60 Hz -25 +85 C
 P2 - Protected
 10,000 AFC Date Code
 RU, cRU, RoHS
 Made in China

Engineer J.D. Aldana

Date 1/26/2010

RoHS mark on bottom of case:

