

Part Number	ADPS375M605J		Revision
Customer P/N	195-500-1010		Revision
Capacitance	6	uF.	Tolerance 5%
Voltage	375	VAC	
Dielectric	Safety Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-40	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


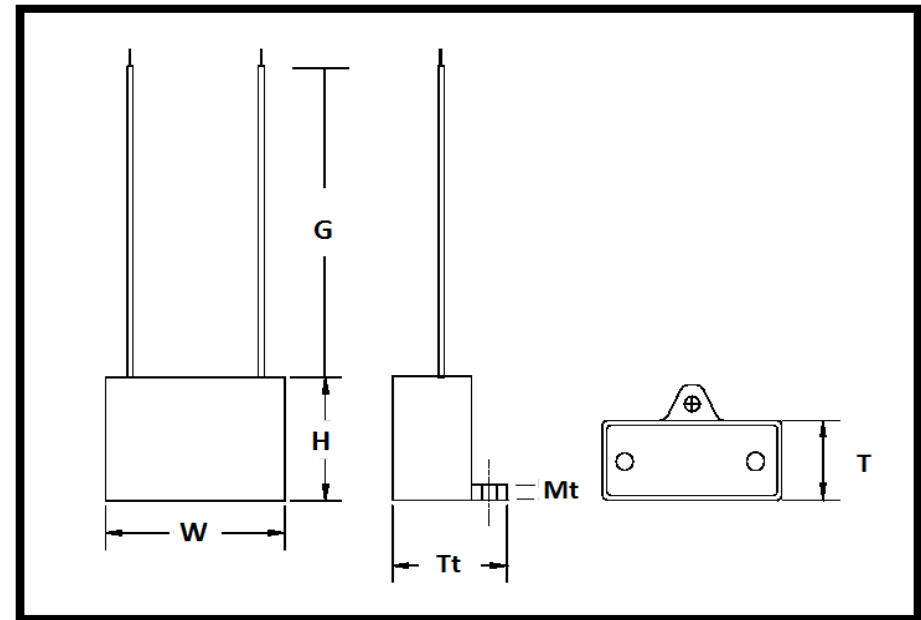
Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.85	0.05
Thickness (T)	0.79	0.05
Height (H)	1.20	0.05
Total Thickness (Tt)	1.20	0.06
Wire Length (G)	4.00	0.50
Wire Gauge (Gw)	20	AWG
Wire Color (Cw)	Black	
Mountng Tab Thickness (Mt)	0.20	ref.

Dimensions in inches

Stamping

Logo/ADPS
6 uF 5% 375 VAC
50/60 Hz -40 - +85 C
P2 - 10,000 AFC
Motor Cap - CBB61
195-500-1010
RU cRU RoHs Date Code

UL Recognized Component

Approval: J.D. Aldana
 Date: June 13, 2011

Protected Capacitor: Segmented Metallized Polypropylene Film
Mounting Hole Opening 0.17"