


|                       |               |                  |           |     |
|-----------------------|---------------|------------------|-----------|-----|
| Part Number           | CBB20-600S274 |                  | Revision  |     |
| Customer P/N          |               |                  | Revision  |     |
| Capacitance           | 0.27          | uF.              | Tolerance | 10% |
| Voltage               | 600           | VAC              |           |     |
| Dielectric            |               | Polypropylene    |           |     |
| Terminal Type         |               | Axial Solid Wire |           |     |
| Operating Temperature | -55 °C.       | to               | 100 °C.   |     |
| Dissipation Factor    | 0.002         | maximum          | @ 120 Hz. |     |

# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

|                 | Dimension | Tolerance |
|-----------------|-----------|-----------|
| Width (W)       | 0.79      | 0.05      |
| Thickness (T)   | 0.60      | 0.05      |
| Length (L)      | 1.28      | 0.06      |
| Lead Length (S) | 2.00      | min.      |
| Lead Gauge (d)  | 20        | AWG       |

*Dimensions in inches*

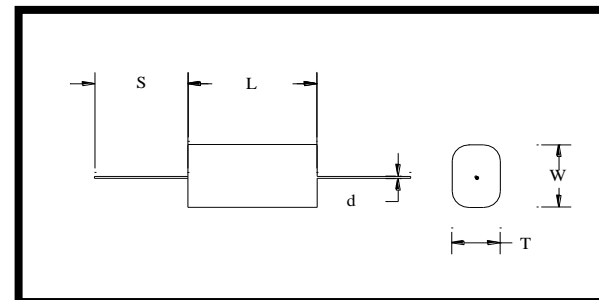

|          |             |
|----------|-------------|
| Stamping | C C C       |
|          | .27 MFD 10% |
|          | 600 - VDC   |



Engineer JD Aldana  
 Date June 28, 2016