


Part Number	CBB5-3GJ030		Revision
Customer P/N			Revision
Capacitance	30	uF.	Tolerance 5.0%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25 °C.-		70 °C.
Dissipation Factor	0.0015	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.66/1.76	0.06
Case Height (H)	4.13	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.75	ref.
Insulating Cup (dia.)	0.58	ref.

Dimensions in inches

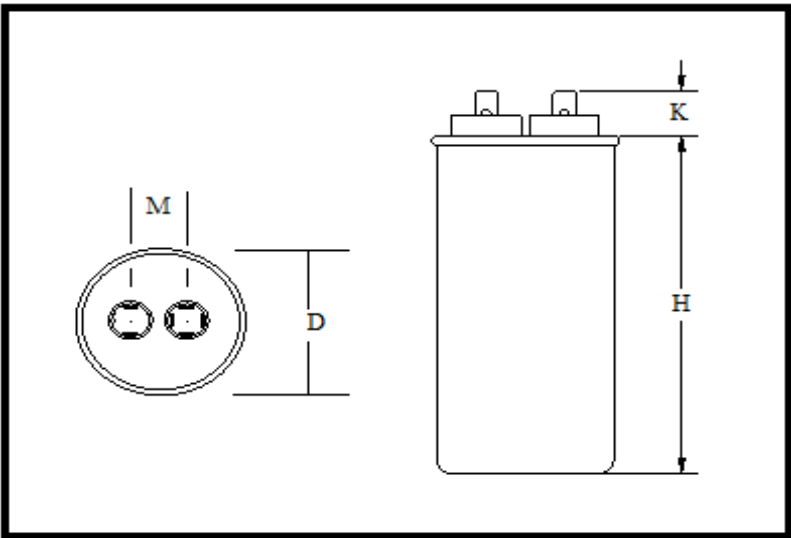

Stamping

LOGO UL
CBB5
30 UF ± 5% 370 VAC
50/60 HZ NO PCB
MAX TEMP 70 °C

UL[®]
C US

Approval : *J. D. Aldana*
 Date : June 20, 2005