

Part Number	CBB60B-250F406-M1		Revision	A
Customer P/N			Revision	A
Capacitance	40	uF.	Tolerance	5%
Voltage	250	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Dual .250" X .03" Quick Connect Terminals			
Operating Temperature		-40		85 °C.
Dissipation Factor	0.001		maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


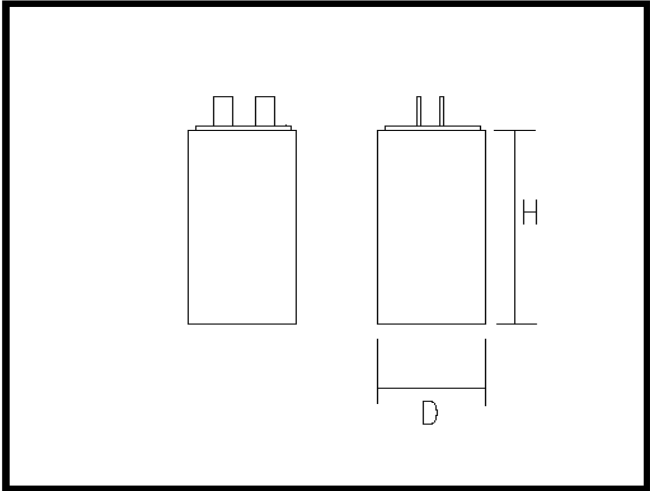
Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.38	0.04
Height (H)	3.15	max.
M8 Stud Length	no stud	Ref.

Dimensions in inches

Stamping

Motor Capacitors
 CBB60B-250F406-M1
 40 uF. +/-5%
 250 VAC 50/60 Hz.
 -40 - +85 C.
 RU, cRU, RoHS
 Datecode

Note: Diameter and Height dimensions are CRITICAL SIZES
 Aluminum Case with Resin Fill (blue plastic cover); P0 Standard

Approval: JD Aldana
 Date: 6/20/2016