


| | | | | |
|-----------------------|--------------------------|---------|-----------|----|
| Part Number | CBB60B-250N106 | | Revision | |
| Customer P/N | | | Revision | |
| Capacitance | 10 | uF. | Tolerance | 5% |
| Voltage | 250 | VAC | | |
| Dielectric | Metallized Polypropylene | | | |
| Terminal Type | Insulated Wire Leads | | | |
| Operating Temperature | -40 | 85 °C. | | |
| Dissipation Factor | 0.001 | maximum | @ 60 Hz. | |


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

| | Dimension | Tolerance |
|-----------------|-----------|-----------|
| Diameter (D) | 1.18 | 0.03 |
| Height (H) | 1.61 | 0.03 |
| Wire Length (G) | 6 | 0.50 |
| Wire Gauge (Gw) | 18 | AWG |
| Wire Color (Cw) | Black | |

Dimensions in inches

| | |
|---|-------------------|
|  | Stamping |
| | Motor Capacitors |
| | CBB60B-250N106 |
| | 10 uF. +/-5% |
| | 250 VAC 50/60 Hz. |
| | -40 - +85 C. |
| 0.04 KVAR | |
| RU cRU | |

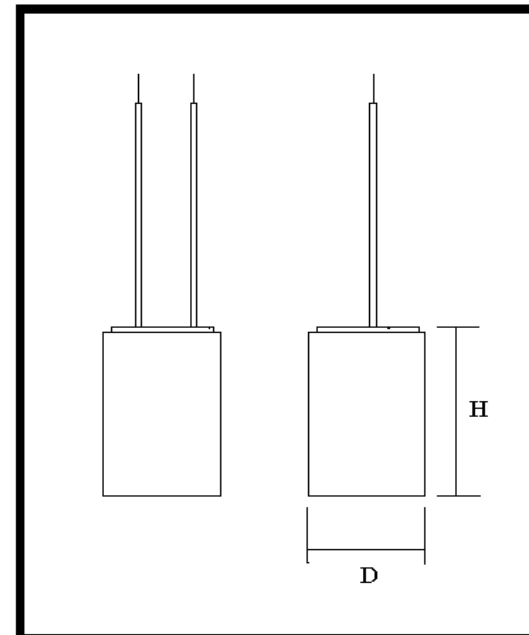

1 Phase 0.04 KVAR Wire Leads must be Solid Wire

Engineer J.D. Aldana
 Date December 27, 2013