


Part Number	CBB60B-450F186-M8		Revision
Customer P/N			Revision
Capacitance	18	uF.	Tolerance 5%
Voltage	450	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	1.57	0.03
Height (H)	2.83	0.06
M-8 Stud		
M8 Stud Length (M)	0.38	0.03

Dimensions in inches

Stamping	Motor Capacitors CBB60B-450F186-M8 18 uF. +/-5% 450 VAC 50/60 Hz. -25 - +85 C.
	RU

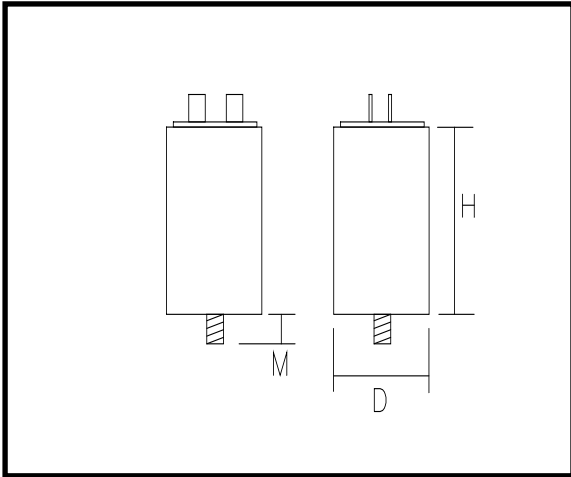

Equipped with M8 Mounting Stud, Lockwasher, and Hex Nut

Engineer J.D. Aldana  
 Date June 14, 2005