

Part Number	CBB61-300M755J		Revision
Customer P/N			Revision
Capacitance	7.5	uF.	Tolerance 5%
Voltage	300	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


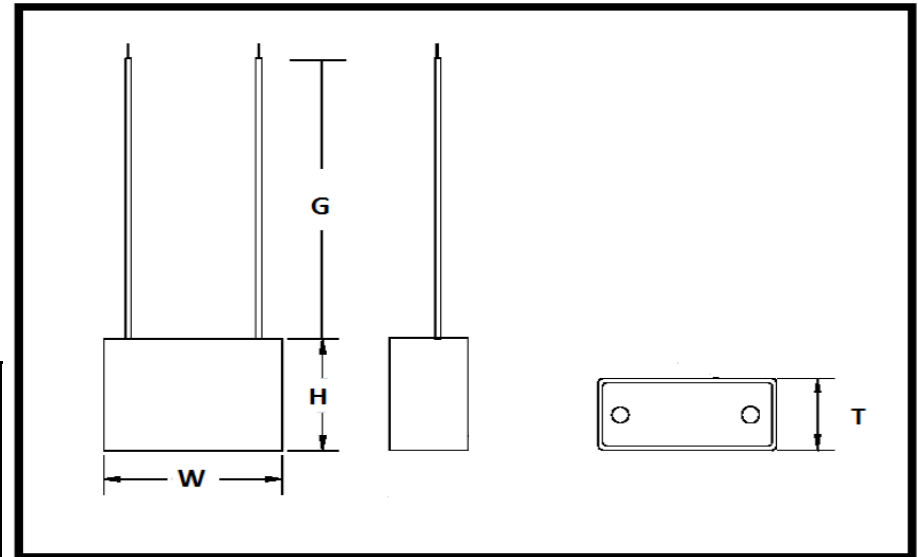
	Dimension	Tolerance
Width (W)	1.81	0.06
Thickness (T)	1.02	0.06
Height (H)	1.57	0.06
Wire Length (G)	4.50	0.50
Wire Gauge (Gw)	18/20	0.16
Wire Color (Cw)	Black	0.02

Dimensions in inches

Stamping

CBB61
15 uF 5% 300 VAC
300 VAC 50 Hz

7.5 uF ± 5%

UL Recognized Component

Engineer J.D. Aldana
 Date June 22, 2020

