

Part Number	CBB62-250S474J		Revision	
Customer P/N			Revision	
Capacitance	0.47	uF.	Tolerance	5%
Voltage	275	VAC		
Dielectric	Metalized Polypropylene			
Terminal Type	PC Board Pin Leads			
Operating Temperature	-40 to +85 °C.			
Dissipation Factor	0.0001	maximum	@ 1 KHz.	

# MOTOR Capacitors, Inc.


Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

		Tolerance
Width (W)	0.94	0.04
Thickness (T)	0.40	0.04
Height (H)	0.78	0.04
Lead Spacing	0.83	ref.
Wire Length (G)	1.00	min.

*dimension in inches*

**Stamping**

Logo  
 CBB62  
 275V X2  
 470NJN FI S N D  
 VDE UL cUL  
 Date Code

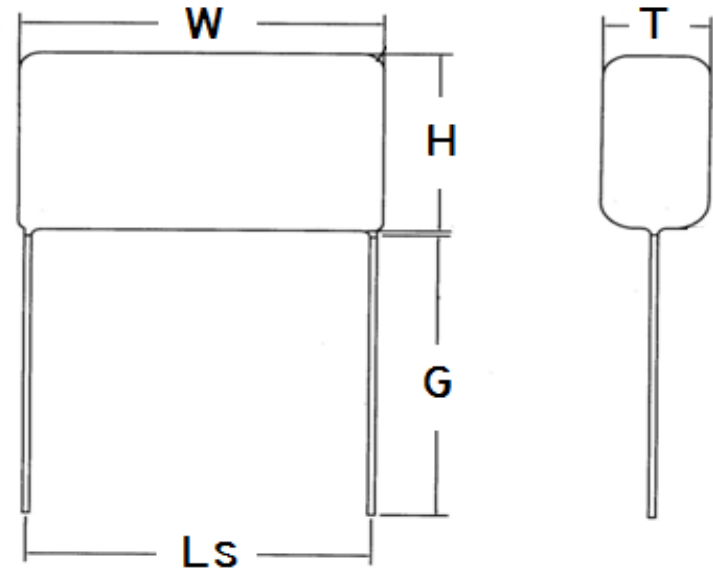

Engineer JD Aldana  
 Date February 15, 2017