


| | | | |
|-----------------------|---|------------------|---------------------|
| Part Number | CBB65-370R0540 | | Revision |
| Customer P/N | | | Revision |
| Capacitance | 40 + 5 | uF. | Tolerance 5% |
| Voltage | 370 | VAC | |
| Dielectric | Metallized Polypropylene | | |
| Terminal Type | .250" Quad-Spade Quick Connect Terminals | | |
| Operating Temperature | -25 oC.- | 85 °C. | |
| Dissipation Factor | 0.001 | maximum @ 60 Hz. | |

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

| | Dimension | Tolerance |
|-----------------------|------------------|-------------|
| Case Diameter (D) | 1.97/2.07 | 0.06 |
| Case Height (H) | 4.75 | 0.06 |
| Terminal Height (K) | 0.56 | ref. |
| Terminal-Terminal (M) | 0.81 | ref. |
| Insulating Cup (dia.) | 0.74 | |

Dimensions in inches

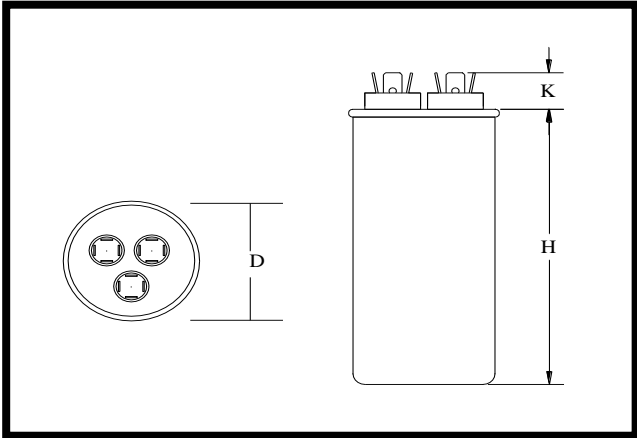

| | | | | | |
|------------------------------------|----|-----|-----------|------|-----------------------|
| Stamping | | | | | |
| Wuxi - Motor Cap CBB65-370R0540 | | | | | |
| 40+5uF 5% 370 VAC | | | | | |
| -25 - +85 C. 50/60 Hz. | | | | | |
| | | | | | RU[®] |
| Protected 10,000 AFC | | | | | |
| Non PCB | RU | cRU | Date Code | RoHS | |

Terminals: Herm (Red-3), Fan (White-1), Common (Black-4)

Approval: J.D. Aldana
Date: **September 15, 2002**