Part Number	**CBB65-370R07E55-M1**		Revision	
Customer P/N			Revision	
Capacitance	**55 + 7.5**	uF.	Tolerance	**5%**
Voltage	**370**	VAC		
Dielectric	**Metallized Polypropylene**			
Terminal Type	**.250" Quad-Spade Quick Connect Terminals**			
Operating Temperature	**-40** oC.-	**85** ºC.		
Dissipation Factor	**0.001**	maximum @ 60 Hz.		

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Case Diameter (D)	**1.97/2.07**	**0.06**
Case Height (H)	**4.00**	**max.**
Terminal Height (K)	**0.56**	**ref.**
Terminal-Terminal (M)	**0.81**	**ref.**
Insulating Cup (dia.)	**0.59**	

Dimensions in inches

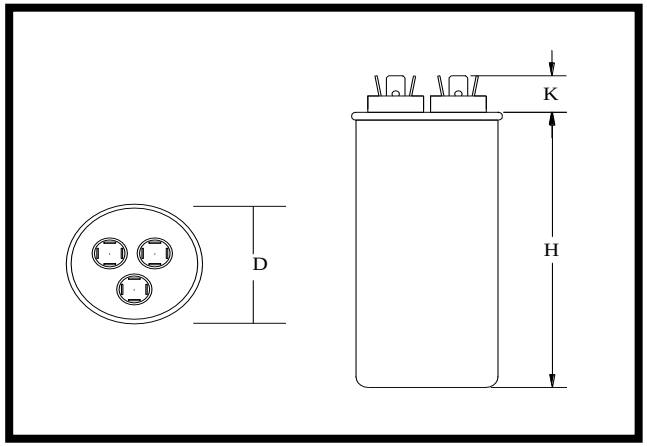

Stamping

Wuxi - Motor Cap
CBB65-370R07E55-M1
55/7.5uF 5% 370 VAC
-40 - +85 C. 50/60 Hz.

Protected 10,000 AFC

Non PCB **ЯU** **cЯU** **Date Code** **RoHS**

Terminals: Herm (Red-3), Fan (White-1), Common (Black-4)

Approval: *JD Aldana*
Date: **July 19, 2012**