

Part Number	CBB65E-440R506		Revision	B
Customer P/N	008-0050		Revision	
Capacitance	50	uF.	Tolerance	5.0%
Voltage	440	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-40 °C.-		70 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	2.50/2.62	0.06
Case Height (H)	3.34	0.06
Terminal Height (K)	0.50	max.
Terminal-Terminal (M)	0.81	0.06
Insulating Cup (dia.)	0.74	ref.
<i>Dimensions in inches</i>		

Stamping	Wuxi - Motor Cap			
	CBB65E-440R506			
	50 uF 5% 440 VAC			
	-40 - +70 C. 50/60 Hz.			
	008-0050			
	S2 Protected 10,000 AFC			
Non PCB	YU	cYU	Date Code	RoHS

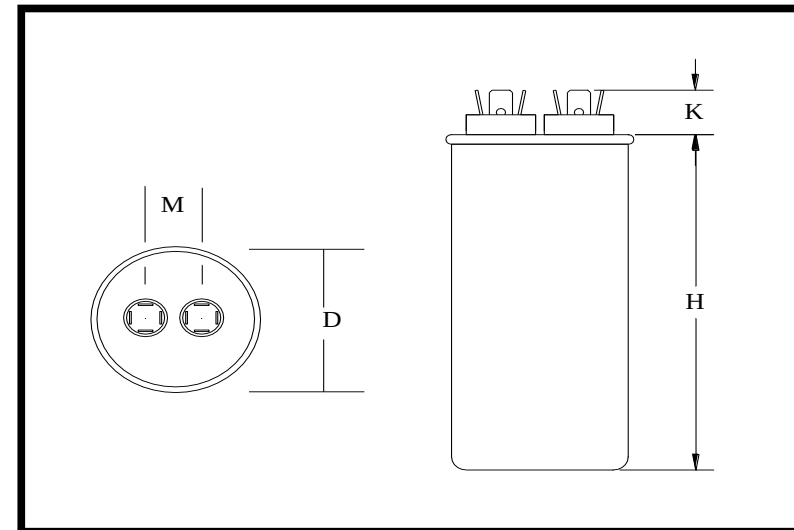

- Meets EIA Standard 456-A
- Rated Life 60,000 Hours

Approval : J.D. Aldana
Date : March 5, 2024