

Part Number	CBB66A-540R356A-M8		Revision	F
Customer P/N			Revision	F
Capacitance	35	uF.	Tolerance	5.0%
Voltage	540	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Dual .250" X .03" Quick Connect Terminals			
Operating Temperature	-25 °C.-		100 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)


www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	2.17	0.04
Case Height (H)	4.92	0.12
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.79	ref.
Insulating Cup (dia.)	0.70	ref.
Bottom Mounting Stud	Yes	M-8

Dimensions in inches

Stamping	AHJK - Motor Cap			
	CBB66A-540R356A-M8			
	35uF 5% 540 VAC			
	-25 - +100 C. 50/60 Hz.			
	C22.2 No. 190-M1985	AMB46C	cRU[®] US	
	Protected 10,000 AFC			
	Non PCB	RU	cRU	Date Code RoHS

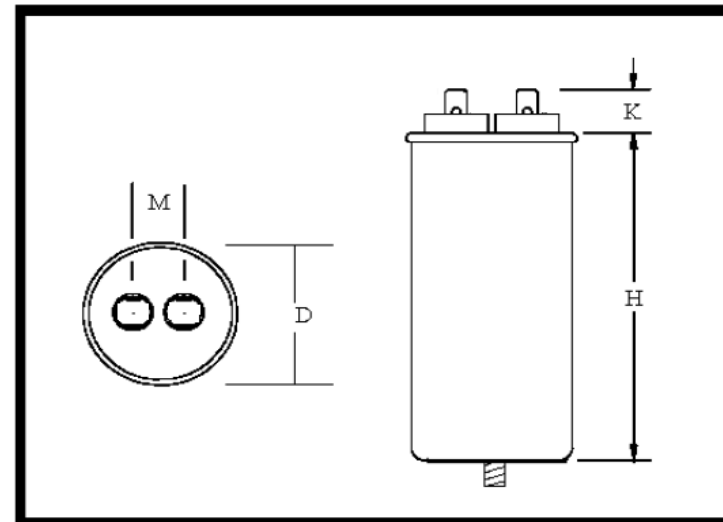

Oil-Filled, Aluminum Can w/ M-8 Bottom Mounting Stud
UL810 UL-cUL Approval (540 VAC); Rated 60,000 Hrs; Product of China
Rated Power (540 VAC @ 50 Hz) = 3.2 KVAR
Rated Current (540 VAC @ 50 Hz) = 5.93 A

Approved: J.D. Aldana
Date: June 27, 2016