

Part Number	<b>CBB66A-550R406A-M8</b>		Revision	D
Customer P/N			Revision	D
Capacitance	<b>40</b>	uF.	Tolerance	<b>5.0%</b>
Voltage	<b>550</b>	VAC		
Dielectric	<b>Metallized Polypropylene</b>			
Terminal Type	<b>Dual .250" X .03" Quick Connect Terminals</b>			
Operating Temperature	<b>-25 °C.-</b>		<b>100 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum	@ 60 Hz.	

# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)

[www.capacitorindustries.com](http://www.capacitorindustries.com)

[info@capacitorindustries.com](mailto:info@capacitorindustries.com)


	Dimension	Tolerance
Diameter (D) Case/Cover	<b>2.17</b>	<b>0.04</b>
Case Height (H)	<b>4.92</b>	<b>0.12</b>
Terminal Height (K)	<b>0.56</b>	<b>ref.</b>
Terminal-Terminal (M)	<b>0.79</b>	<b>ref.</b>
Insulating Cup (dia.)	<b>0.70</b>	<b>ref.</b>
Bottom Mounting Stud	<b>Yes</b>	<b>M-8</b>

*Dimensions in inches*

Stamping

**AHJK - Motor Cap**  
**CBB66A-550R406A-M8**  
**40uF 5% 550 VAC**  
**-25 - +100 C. 50/60 Hz.**

**Protected 10,000 AFC**  
**Non PCB    Date Code    RoHS**

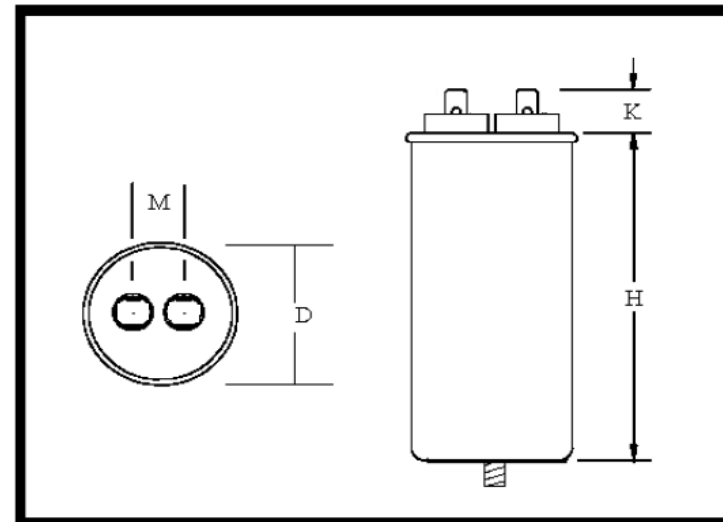

**Oil-Filled, Aluminum Can w/ M-8 Bottom Mounting Stud**  
**UL810 UL-cUL Approval (540 VAC); Rated 60,000 Hrs**  
**Rated Power (550 VAC @ 50 Hz) = 3.8 KVAR**  
**Rated Current (550 VAC @ 50 Hz) = 6.91 A**

Approved: J.D. Aldana  
Date: May 13, 2016