


| | | | |
|-----------------------|-------------|------------------------|---------------|
| Part Number | MEX250S683K | Revision | |
| Customer P/N | | Revision | |
| Capacitance | 0.068 | uF. | Tolerance 10% |
| Voltage | 250 | VAC | |
| Dielectric | | Metallized Polyester | |
| Terminal Type | | PCB-Mount Pins | |
| Operating Temperature | | -40 85 | °C. |
| Dissipation Factor | 1.00% | maximum @ 25 °C, 1 KHz | |

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

| | Dimension | Tolerance |
|------------------|-----------|-----------|
| Width (W) | 0.71 | 0.04 |
| Thickness (T) | 0.23 | 0.04 |
| Height (H) | 0.45 | 0.04 |
| Lead Spacing (S) | 0.60 | ref. |
| Wire Length (G) | 1.00 | ref. |
| Wire Gauge (Gw) | 20 | AWG |

Dimensions in inches

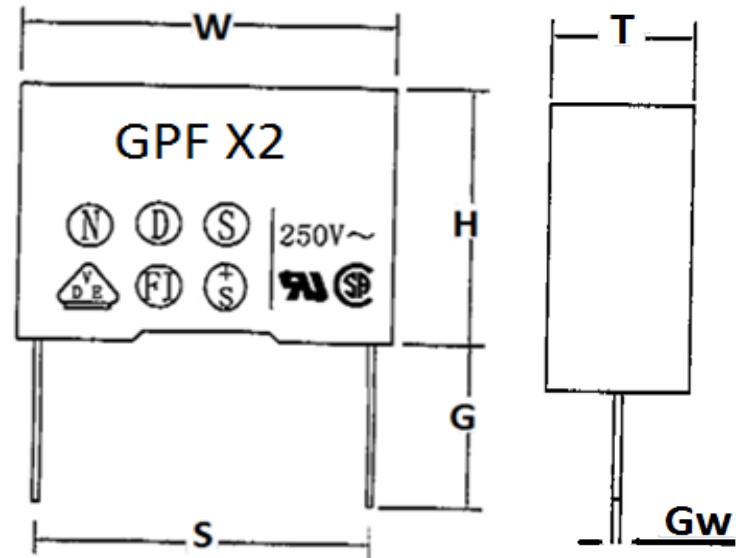

| | |
|----------|---|
| Stamping | Logo |
| | 0.33 uF K X2 250/275 VAC MEX GPF 40/85/21 N D FI S S+ RU, cRU, VDE |



Capacitor housed in a Yellow, Plastic Box.

Engineer J.D Aldana
 Date May 24, 2016