


Part Number	MPX250S124J	Revision	
Customer P/N		Revision	
Capacitance	0.12	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	PCB-Mount Pins		
Operating Temperature	-40	85	°C.
Dissipation Factor	0.030%	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	inches	mm.
Width (W)	0.71	18.0
Thickness (T)	0.28	7.0
Height (H)	0.54	13.5
Lead Spacing (S)	0.59	15.0
Wire Length (G)	1.00	25.4
Wire Gauge (Gw)	20	AWG

Dimensions in inches

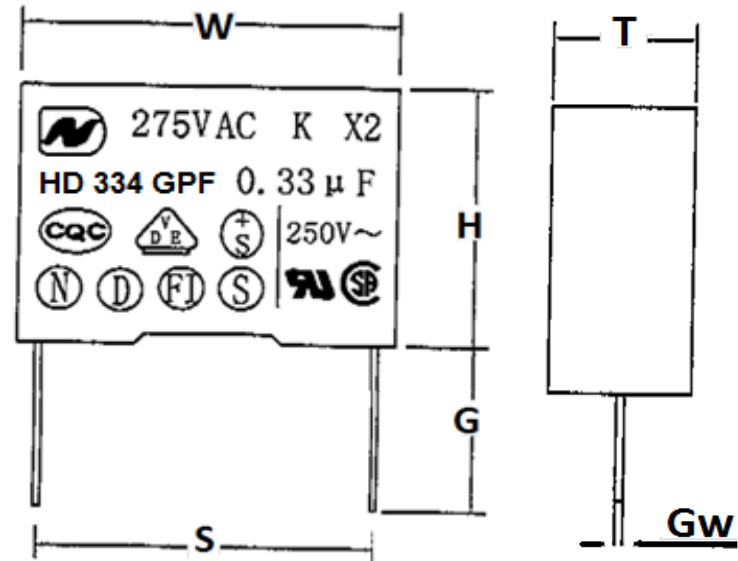

Stamping	MPX GPF/C 0.12 uF , 5%, SH 250/275 VAC
	
	RU, cRU, VDE

Capacitor housed in a Yellow, Plastic Box.

Engineer J.D Aldana
 Date February 12, 2001