


Part Number	MPX250S224J	Revision	
Customer P/N		Revision	
Capacitance	0.22	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	PCB-Mount Pins		
Operating Temperature	-40	85	°C.
Dissipation Factor	0.03%	maximum	45454.545

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	inches	mm.
Width (W)	1.06	27
Thickness (T)	0.33	8
Height (H)	0.67	17
Lead Spacing (S)	0.59	15
Wire Length (G)	1.00	25
Wire Gauge (Gw)	20	AWG

Dimensions in inches

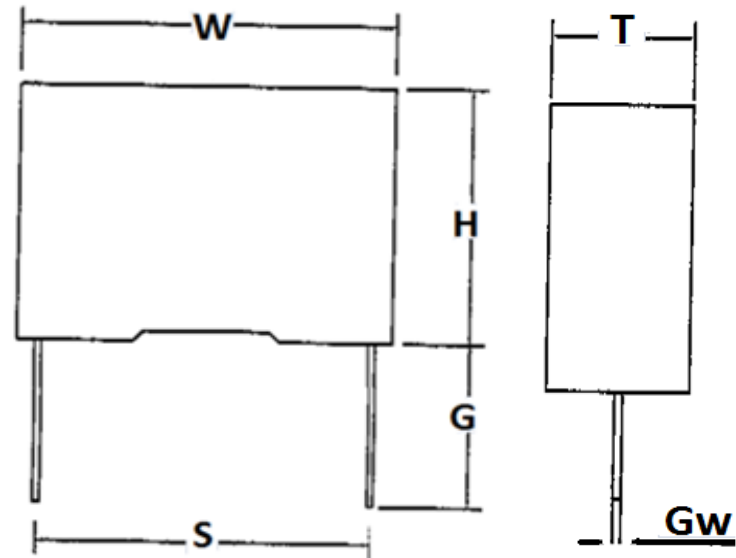

Stamping	MPX GPF/C X2
	0.22 uF J SH
	250/275 VAC
	ЯU, сЯU, VDE

Capacitor housed in a Yellow, Plastic Box.

Engineer J.D. Aldana
 Date February 12, 2001