


Part Number	MPX250S154J		Revision	
Customer P/N			Revision	
Capacitance	0.15	uF.	Tolerance	5%
Voltage	250	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	PCB-Mount Pins			
Operating Temperature	-40	85	°C.	
Dissipation Factor	0.030%	maximum @ 60 Hz.		


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	inches	mm.
Width (W)	0.71	18.0
Thickness (T)	0.31	8.0
Height (H)	0.55	14.0
Lead Spacing (S)	0.59	15.0
Wire Length (G)	1.00	25.4
Wire Gauge (Gw)	20	AWG

*Dimensions in inches*

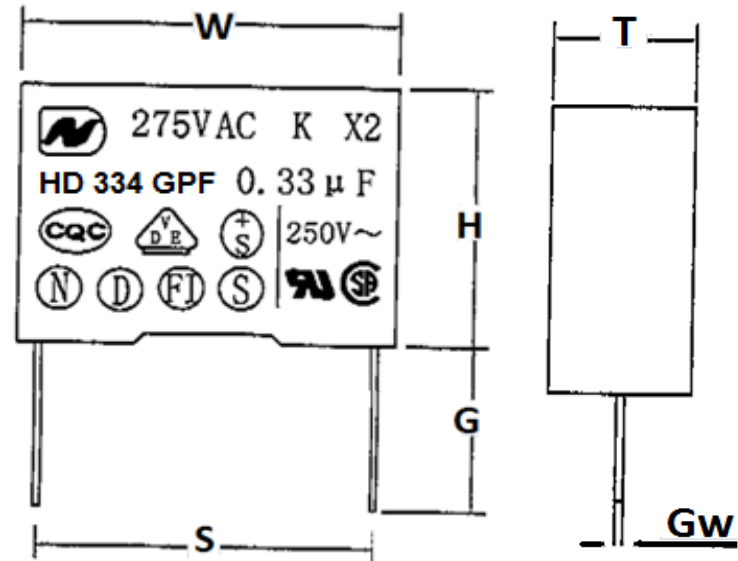

Stamping	MPX GPF/C 0.15 uF , 5%, SH 250/275 VAC
	
	RU, cRU, VDE

Capacitor housed in a Yellow, Plastic Box.

Engineer J.D Aldana  
 Date February 12, 2001